



Licensed by Carrier Corporation

# E6 Methos GD

Closed multideck with an optimized footprint and best customizable design



COOLtec FlexCOOL

## Benefits at a glance

- Highest footprint productivity<sup>1</sup>
- Largest selection of configurations<sup>1</sup>
- Optimized design for back-to-back installation
- Easy access of evaporator and fans

<sup>1</sup> Related to products available under CCR product portfolio.


[www.ccr.com](http://www.ccr.com)



Part of the  
Climate Control  
Revolution

# E6 Methos GD

Closed multideck with an optimized footprint and best customizable design<sup>2</sup>




## Standard configuration

- Swing insulated All-glass Frameless door with small dark grey print and solid mullion
- Display shelves with single side coating and 40mm scanner price rails
- Integrated bumper and kickplate
- Energy efficient EC fans
- Bottom evaporator
- Multiplex kit

## Customization

- Large selection of various door options:
  - Swing fully Transparent door with or without mullion (Transparent Gap Cover)
  - Swing fully Transparent door with Anti-reflex coating with or without mullion (Transparent Gap Cover)
  - Ultra slim fully Transparent 400mm door with or without mullion (Transparent Gap Cover)
- Horizontal LED lighting for canopy, shelf and front shelf
- Vertical LED lighting for door mullion, dividing wall and endwall
- Dimming box for Premium LED lighting
- Stainless steel interior
- Large selection of shelves, price rails and front stoppers
- Reinforced (additional) front bumper
- Stainless steel bumper 20 x 20 mm

## Basic models

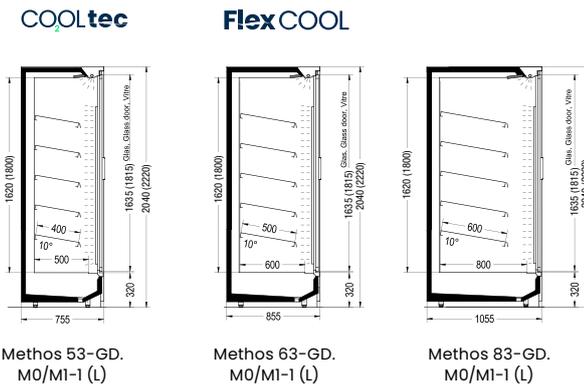

E6 Methos GD	Unit	53	63	83
Internal height STD-height	mm	1620	1620	1620
Internal height L-height	mm	1800	1800	1800
Bottom shelf depth	mm	500	600	800
Shelf depth (min. / std. / max.)	mm	350 / 400 / 400	400 / 500 / 550	400 / 600 / 600
Shelves STD-height (min. / std. / max.)	rows	4 / 4 / 5	3 / 4 / 6	3 / 4 / 6
Shelves L-height (min. / std. / max.)	rows	4 / 5 / 6	4 / 5 / 7	4 / 5 / 7
Load per module	kg / 125cm	510	665	730
Module length without endwalls (40mm each)	125	✓	✓	✓
	150	✓	-	-
	170	-	✓	-
	188	✓	✓	✓
	210	-	✓	-
	250	✓	✓	✓
	375	✓	✓	✓
Temperature class M0 / Storage temp. -2/0 °C		✓	✓	✓
Temperature class M1 / Storage temp. -1/+1 °C		✓	✓	✓

\* Per module two 625 mm display shelves per row useable

<sup>1</sup> Energy Labels might change depending on cabinet configuration and are based on CO<sub>2</sub> remote refrigerant technology

<sup>2</sup> Related to products available under CCR product portfolio.

Check for availability of product in different height and module length for each solution type directly with CCR team.



CCR reserves the right to change certain information and specifications contained in this document at any time and without prior notice. Since standards, specifications and designs are subject to occasional change, please ask for confirmation of the information given in this publication.

[www.ccr.com](http://www.ccr.com)

