



Licensed by Carrier Corporation

Velando[®] Compact Space

Cutting edge deep-freeze solution for supermarkets and C-stores




Benefits at a glance

- A reliable, high-quality solution for your frozen food area
- Performance redefined with CCR's high performance air curtain and evaporator air flow technology
- Harmonised exterior design with Optimer[®] LG EVO chiller multideck
- Large visible area
- Plug & play for remote monitoring with connectivity to various store gateways
- Wide range of application: freezer and chiller mode



Velando® Compact Space

Cutting edge deep-freeze solution for supermarkets and C-stores




Standard configuration

- Painted panels galvanized steel with hard-wearing powder coated finish, FA0605 white interior, FA0633 nimbus grey exterior
- Door frame natural (silver) E6 EV1
- Solid endwalls
- Integrated plastic front bumper, FA0632 statusgrey
- Temperature-assured forced-air cooling with honeycomb air outlet
- Energy optimized fans
- 4 rows of standard grid shelves with display covers and 40 mm scanner price rails at shelves and at bottom deck
- Vertical smart LED 5000 K cool white at endwalls and behind each mullions
- Floor close-off seal at both lateral sides and front side
- Triple glass doors with heated frame
- Electronic controller
- Natural refrigerant R290 (propane)

Customization

- Panorama endwalls or no endwalls for multiplexing
- Multiplex kits: side by side kit and transparent plexi partition, back to back kit and side covers, possible up to 2*X block installations
- Rear wall panelling
- Heavy duty castors with reinforced bottom
- Display baskets and wire dividers
- Price rail versions
- Special short display shelf to lowest position
- Country specific mains cable
- Connectivity options to various store gateways
- Air deflector in cooling unit for better air circulation
- Reverse the direction of door opening
- Up to 6 rows of display shelves

Available in:

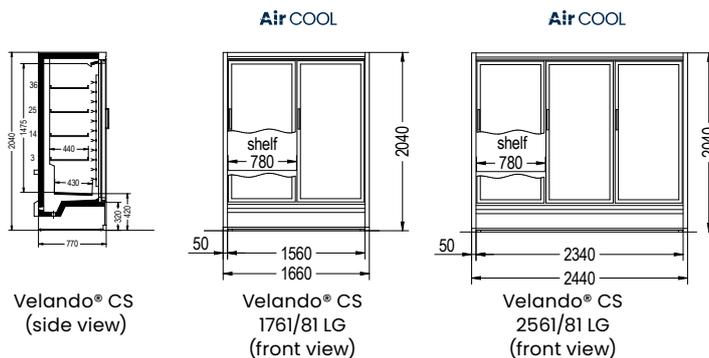

Velando® CS 2561/81 LG

Velando® CS ²	Unit	1761/81 LG	2561/81 LG	1781 LG	2581 LG
Storage Temperature	[°C]	-2...0	-22...-24	-22...-24	-22...-24
Refrigerant		R290	R290	R290	R290
Module length with endwalls	[mm]	1662	2443	1662	2443
Cabinet depth	[mm]	770	770	770	770
Height outside	[mm]	2040	2040	2040	2040
Net volume	[l]	1013	1519	1013	1519
Total display area*	[m ²]	3,32	4,36	3,32	4,36
Total energy consumption****	[kWh/d]				
Freezer mode		40,75	52,91	40,75	52,91
Chiller mode		27,19	40,4		
Heat dissipation***	[W]				
Freezer mode		1698	2205	1698	2205
Chiller mode		1133	1683		
Temperature class**		M0 / L1	M0 / L1	L1	L1

* With panorama sidewalls | ** At climate class 3 according to ISO 23953 | *** With solid endwalls | **** measured in accordance with the applicable EU delegated regulation
 1 Energy Labels might change depending on cabinet configuration and are based on R290 plug-in refrigerant technology
 2 All technical data includes LED lighting consumption where applicable



CCR reserves the right to change certain information and specifications contained in this document at any time and without prior notice. Since standards, specifications and designs are subject to occasional change, please ask for confirmation of the information given in this publication.

www.ccr.com

