



Licensed by Carrier Corporation

# visiCUBE® PANO

Highly transparent, switchable plug-in island for premium promotional sales



## Benefits at a glance

- High degree of flexibility in application and customization
- Transparent modern cubic design for optimal floor space usage
- Large number of paintable parts and extended selection of plastic colors
- Wide range of combinations and optional accessories for the basic and upper segment
- Easy maintenance for reduced service time and low life cycle costs



# visiCUBE® PANO



Highly transparent, switchable plug-in island for premium promotional sales


## Standard configuration

- Sliding glass lids (stepped profile)
- Triple layer glass panels all around
- Internal and external panels galvanized steel with hard-wearing powder-coated finish, inside in Signal White, outside in Nimbus Grey and plastic parts in Graphite Grey
- Low feet
- Temperature-assured forced-air cooling
- Automatic defrost with drip water evaporation
- Electronic control with integrated temperature display
- Natural refrigerant R290

## Customization

- Sliding glass lids (E profile)
- Smart LED, handrail lighting, light color Neutral White 4000K, Cool White 5700K, Fresh red
- Scanner price rail, 40 or 60 mm
- Height adjustable wire shelves
- Wire divider, front-back
- Product dividers
- Bottom bumper all around, plastic or stainless steel
- Wooden cladding with or without stainless steel bumper
- Extended cabinet feet (90mm) with or without bottom plinth panel all around
- Castors, 2 rotating and 2 covered wheels or 4 rotating wheels (90 mm) incl. brakes
- Connectivity options to various store gateways
- Easy condenser access
- Condenser filter
- Additional temperature display
- Separate power cable for lighting
- Country specific mains cable

## Available in:

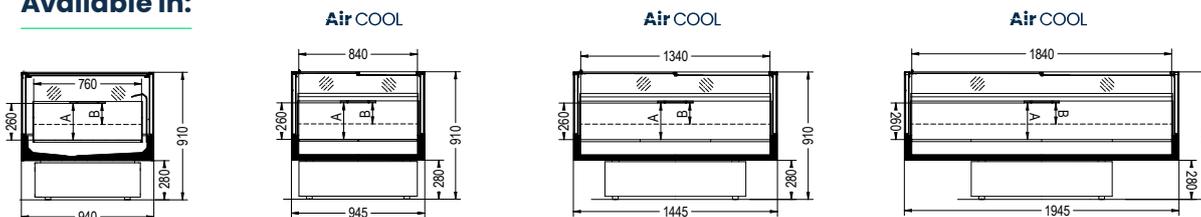

visiCUBE® PANO  
(Side view)

visiCUBE® PANO 100  
(Front view)

visiCUBE® PANO 150  
(Front view)

visiCUBE® PANO 200  
(Front view)

visiCUBE® PANO switchable <sup>2</sup>	Unit	100	150	200
Temperature	[°C]	-1...+1 / -2...0 -22...-24	-1...+1 / -2...0 -22...-24	-1...+1 / -2...0 -22...-24
Refrigerant		R290	R290	R290
Width	[mm]	945	1445	1945
Depth	[mm]	940	940	940
Height (without castors)	[mm]	910	910	910
Volume (Ll / Ml)	[l]	166	265	364
Total display area	[m <sup>2</sup> ]	1,29	1,87	2,46
Energy consumption** Freezer mode (Ll) Chiller mode (Ml / M0)	[kWh/d]	7,69 4,46 / 4,62	11,29 6,87 / 7,29	13,56 7,87 / 8,19
Average heat dissipation Freezer mode (Ll) Chiller mode (Ml / M0)	[W]	320 186 / 193	470 286 / 304	565 327 / 341
Temperature class*		Ml / M0 Ll	Ml / M0 Ll	Ml / M0 Ll

\* At climate class 3 according to ISO 23953 | \*\* Measured in accordance with the applicable EU delegated regulation

1 Energy Labels might change depending on cabinet configuration and are based on R290 plug-in refrigerant technology

2 All technical data includes LED lighting consumption where applicable



CCR reserves the right to change certain information and specifications contained in this document at any time and without prior notice. Since standards, specifications and designs are subject to occasional change, please ask for confirmation of the information given in this publication.

[www.ccr.com](http://www.ccr.com)

