



Licensed by Carrier Corporation

# Visor<sup>®</sup> Q

Plug-in chest freezer for flexible applications



## Benefits at a glance

- Large-volume freezer designed for versatile configurations
- Stylish design with ergonomically curved sliding lids
- Efficiency-optimized components
- Maximized product presentation area
- Optimized footprint for superior efficiency with Top Freezer
- Eco friendly and future ready natural Propane refrigerant



# Visor® Q

Plug-in chest freezer for flexible applications



## Standard configuration

- Exterior metal sheet color: mouse grey RAL 7005
- Exterior plastic parts color: Telegrey RAL 7045
- Plastic bumper RAL 7045 (top / bottom)
- Interior sheet metal parts color: White
- Adjustable feet
- Grid shelves
- Interior partition grid color: White
- Defrost water automatically heated
- Power and lighting cord
- Electronic temperature control with communication interface
- Price rails
- LED lighting hand rail


## Customization

- Exterior color (on request)
- Castors (on request)
- Dry shelves for non-refrigerated product presentation on top
- Multiplexing kit (on request)



Visor® Q island installation, back-to-back and crown end including dry shelf.

## Available in

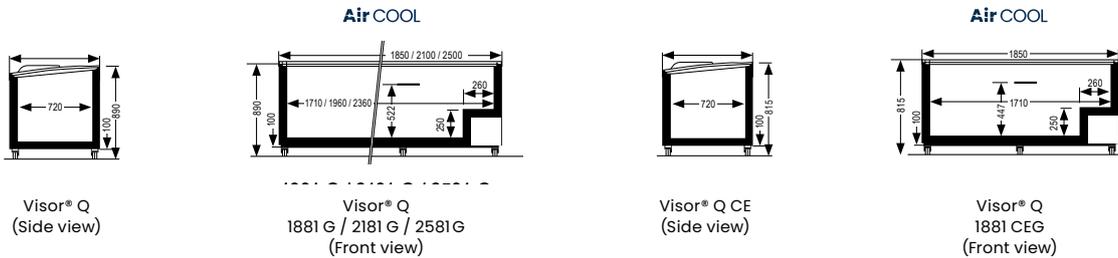

Visor® Q freezer	Unit	1881 CEG	1881 G	2181 G	2581 G
Temperature	[°C]	-22...-24	-22...-24	-22...-24	-22...-24
Refrigerant		R290	R290	R290	R290
Width	[mm]	1850	1855	2105	2505
Depth	[mm]	860	860	860	860
Height	[mm]	815	890	890	890
Volume	[l]	430	512	592	725
Total display area	[m <sup>2</sup> ]	1,00	1,00	1,20	1,46
Energy consumption**	[kWh/d]	5,48	5,48	6,27	7,31
Average heat dissipation	[W]	228	228	261	305
Temperature class*		L1	L1	L1	L1

\* At climate class 3 according to ISO 23953 | \*\* Measured in accordance with the applicable EU delegated regulation  
 † Energy Labels might change depending on cabinet configuration and are based on R290 plug-in refrigerant technology  
 Images shown may differ slightly from the product



CCR reserves the right to change certain information and specifications contained in this document at any time and without prior notice. Since standards, specifications and designs are subject to occasional change, please ask for confirmation of the information given in this publication.

[www.ccr.com](http://www.ccr.com)

