

Outdoor CO₂ transcritical refrigeration system for convenience stores and small supermarkets

QuietCOOL₂



New extension

1-48 kW MT cooling capacity
1-7 kW LT cooling capacity



CR11 wide capacity range
100% down to 10%



Low sound level



Simple / intuitive display



Heat reclaim for heating or sanitary hot water



80 bar service pressure



130 bar high pressure design



Easy to service



Optimized footprint



PFAS/TFA free refrigerant

Brochures



* Features are only valid for new extension models




Part of the
Climate Control
Revolution

QuietCO₂OL

By expanding the cooling capacity to 48 kW, QuietCO₂OL delivers a compact, simple and economical solution with high efficiency and reliable stability to satisfy diverse client needs.

Cooling capacity

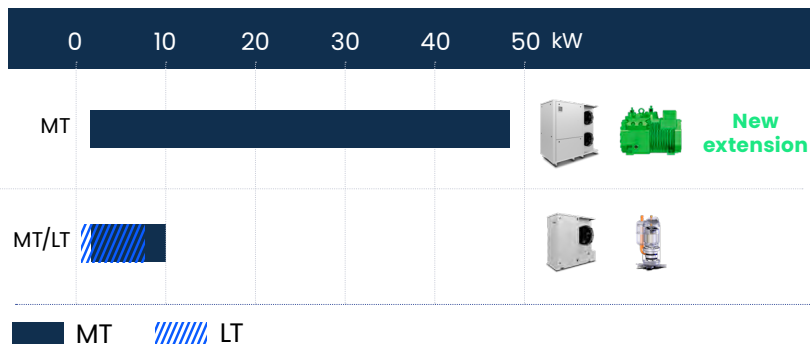

New extension models	Q _o (kW)	
	Min*	Max**
QC MT 4PTE 7KC	1,8	12,0
QC MT 4MTE 10KC	2,8	19,5
QC MT 4KTE 12KC	4,2	29,5
QC MT 4HTE 20KC	5,4	37,5
QC MT 4GTE 30KC	7	48,7

*CR11 /** Inverter
Evaporating temp -8°C MT @ ambient 32°C

Options	New extension
Standard controls	Carel
Danfoss/Wurm/Eckelmann controller	○
Bitzer CR11 compressor	●
Inverter instead of CR11	○
Connection for heat reclaim	○
1 level heat reclaim with 3-way valve	○
Dual HP PRV	○
Energy meter	○
Heresite coating /Primacoat coil	○
Standard receiver volume (L)	50
Standard maximum working pressure (bar)	80/80/130

● Standard ○ Option

* New extension models available from October 2026

Welcome to the Climate Control Revolution



More than **24000** units produced



Profroid reserves the right to change certain information and specifications contained in this document at any time and without prior notice. Since standards, specifications and designs are subject to occasional change, please ask for confirmation of the information given in this publication

www.ccr.com

